

# MASTER WORKS™

## Triaxial

### Introduction

Master Works™ range of ancillaries includes a stitched triaxial reinforcement fabric. This triaxial has an enhanced wet out and the sizing on the yarn is water soluble so there is an improved bond.

The triaxial reinforcement is (60/60/60) stitched E glass weighing 150 gm/m<sup>2</sup>. It has been specifically manufactured for compatibility and use with the Master Works™ resin systems.

### Features / Benefits

- Easily wetted by the Master Works™ resins
- Provides good resin/glass adhesion
- Light weight
- The fabric is readily drapable and conforms easily to complex shapes
- This conformity means that limited glass cutting is required
- Multiaxial orientation provides good all-round laminate dimensional stability
- In the majority of applications only 1-2 layers of reinforcement are required reducing production time and, with good wettability, increasing productivity

### Technical Information


Weight	150 gm / m <sup>2</sup>
Composition	E glass
Orientation	60/60/60 stitched triaxial
Roll width	1.270m



### Processing

In general use it is recommended that Master Works™ reinforcement is used in 2 layers, one behind the gelcoat and the other, separated by a spacer layer, at the back of the laminate.

This laminate construction method results in a simple sandwich construction with good rigidity and impact resistance. (See Master Works™ Laminating Guidelines). Where the Master Works™ material is being used as a coating, for example onto polystyrene forms, one layer of reinforcement fabric is sufficient to provide a higher impact resistance.

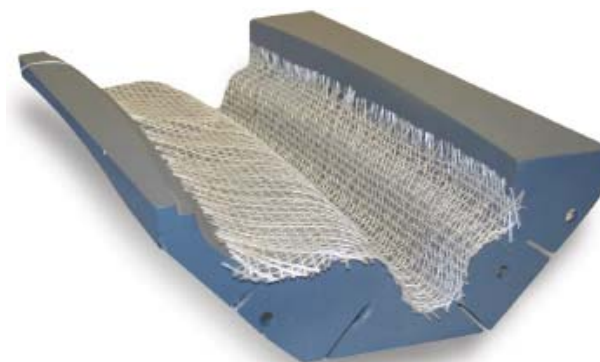

### Application Areas

- Laminate construction
- Reinforcement of positive spray systems
- Crack bridging
- Mold support casings

MASTER WORKS™ is a licensed trademark. These suggestions and data are based on information we believe to be reliable. They are offered in good faith, but without guarantee, as conditions and methods of use of our products are beyond our control. We recommend that the prospective user determine the suitability of our material and suggestions before adopting them on a commercial scale. Suggestions for uses of our products or the inclusion of descriptive material from patents and the citation of specific patents in this publication should not be understood as recommending the use of our products in violation of any patent or as permission or license to use any patents of PUMA Polymers.

V2-052909

**PUMA Polymers**

PO Box 5413, 2003 Curtain Pole Road, Chattanooga, TN 37406  
Toll Free: 877-744-0499 Telephone: 423-697-0499 Fax: 423-697-0437

[www.pumapolymers.com](http://www.pumapolymers.com)